


Flache Stopfen

Material: LDPE natur

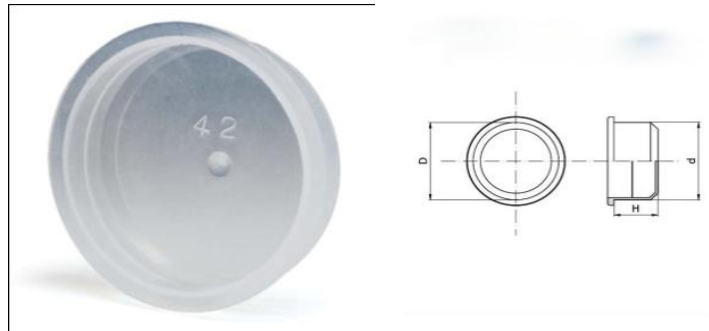

Sehr flacher Stopfen. Ideal zum Einsatz bei flachen Bohrungen

Art-Nr.	Anwendung	Maße			VE/Stk.
		d	D	H	
01-02-003-001		2,0	6,5	3,0	1000
01-02-003-002		2,5	6,5	3,5	1000
01-02-003-003		3,0	6,5	4,5	1000
01-02-003-004		3,5	7,0	4,5	1000
01-02-003-005		4,0	7,5	5,0	1000
01-02-003-006		4,5	8,0	5,0	1000
01-02-003-007		5,0	9,0	6,0	1000
01-02-003-008		5,5	9,0	6,0	1000
01-02-003-009		6,0	9,5	6,0	1000
01-02-003-010		6,5	10,0	7,0	1000
01-02-003-011		7,0	10,0	6,0	1000
01-02-003-012		7,5	10,5	6,5	1000
01-02-003-013		8,0	11,0	7,0	1000
01-02-003-014		8,5	11,5	7,5	1000
01-02-003-015		9,0	11,5	7,5	1000
01-02-003-016		9,5	12,5	7,5	1000
01-02-003-017		10,0	13,0	8,5	1000
01-02-003-018		10,5	13,5	8,5	1000
01-02-003-019		11,0	14,5	8,5	1000
01-02-003-020		11,5	14,5	8,5	1000
01-02-003-021		12,0	14,5	9,0	1000
01-02-003-022		12,5	15,5	9,0	1000
01-02-003-023		13,0	16,5	9,5	1000
01-02-003-024		13,5	16,5	9,5	1000
01-02-003-025		14,0	17,5	10,0	1000
01-02-003-026		14,5	17,5	9,5	1000
01-02-003-027		15,0	18,0	9,5	1000
01-02-003-028		15,5	18,5	9,5	1000
01-02-003-029		16,0	19,5	10,0	1000
01-02-003-030		16,5	19,5	10,5	1000
01-02-003-031		17,0	20,5	10,5	1000
01-02-003-032		17,5	21,0	10,5	1000
01-02-003-033		18,0	21,5	10,5	1000

01-02-003-034		18,5	23,0	10,0	1000
01-02-003-035		19,0	22,0	10,0	1000
01-02-003-036		19,5	23,0	10,5	1000
01-02-003-037		20,0	23,5	11,0	1000
01-02-003-038		20,5	24,5	10,5	1000
01-02-003-039		21,0	24,5	11,0	1000
		Maße			
Art-Nr.	Anwendung	d	D	H	VE/Stk.
01-02-003-040		21,5	25,5	11,0	1000
01-02-003-041		22,0	25,5	11,0	1000
01-02-003-042		22,5	26,0	10,5	1000
01-02-003-043		23,0	27,0	10,5	1000
01-02-003-044		23,5	27,0	10,5	1000
01-02-003-045		24,0	28,0	11,5	1000
01-02-003-046		24,5	28,0	10,5	1000
01-02-003-047		25,0	28,0	12,0	1000
01-02-003-048		25,5	29,0	10,5	1000
01-02-003-049		26,0	30,5	10,5	1000
01-02-003-050		26,5	30,0	10,5	1000
01-02-003-051		27,0	31,0	9,5	1000
01-02-003-052		27,5	31,0	10,5	1000
01-02-003-053		28,0	32,5	10,5	1000
01-02-003-054		28,5	32,0	10,0	1000
01-02-003-055		29,0	32,0	9,5	1000
01-02-003-056		29,5	33,0	10,5	1000
01-02-003-057		30,0	33,0	10,0	1000
01-02-003-058		30,5	34,0	10,0	1000
01-02-003-059		31,0	36,0	10,5	1000
01-02-003-060		31,5	35,0	10,5	1000
01-02-003-061		32,0	37,0	10,5	1000
01-02-003-062		32,5	37,5	10,5	1000
01-02-003-063		33,0	38,0	10,5	1000
01-02-003-064		33,5	37,5	10,5	1000
01-02-003-065		34,0	38,5	10,5	1000
01-02-003-066		34,5	38,0	10,5	1000
01-02-003-067		35,0	40,0	10,5	1000
01-02-003-068		35,5	39,0	10,5	1000
01-02-003-069		36,0	41,0	11,0	1000
01-02-003-070		36,5	40,0	10,5	1000
01-02-003-071		37,0	42,0	11,0	1000
01-02-003-072		37,5	41,5	10,5	1000
01-02-003-073		38,0	43,0	10,5	1000
01-02-003-074		38,5	42,0	10,5	1000
01-02-003-075		39,0	44,0	10,5	1000
01-02-003-076		39,5	45,0	12,5	1000
01-02-003-077		40,0	45,0	10,5	1000
01-02-003-079		41,0	46,0	10,5	500
01-02-003-080		42,0	46,5	10,5	500
01-02-003-081		43,0	48,0	12,5	500

Art-Nr.	Anwendung	Maße			VE/Stk.
		d	D	H	
01-02-003-082		44,0	49,0	10,5	500
01-02-003-083		45,0	50,0	12,5	500
01-02-003-084		46,0	51,0	10,5	500
01-02-003-085		47,0	51,5	10,5	500
01-02-003-086		48,0	52,5	10,5	500
01-02-003-087		49,0	54,5	11,0	500
01-02-003-088		50,0	54,0	10,0	500
01-02-003-089		51,0	56,0	11,0	500
01-02-003-090		52,0	57,5	11,0	500
01-02-003-091		53,0	59,0	11,0	500
01-02-003-092		54,0	61,0	11,0	500
01-02-003-093		55,0	61,0	11,0	500
01-02-003-094		56,0	63,0	12,0	500
01-02-003-095		57,0	61,0	10,0	500
01-02-003-097		58,0	65,0	11,0	500
01-02-003-098		59,0	65,0	11,0	500
01-02-003-099		60,0	65,0	11,0	500
01-02-003-100		61,0	67,5	11,0	500
01-02-003-102		62,0	68,0	11,0	500
01-02-003-103		63,0	66,5	12,5	500
01-02-003-104		64,0	67,5	9,5	500
01-02-003-105		65,0	69,0	10,0	500
01-02-003-106		66,0	71,0	12,0	500
01-02-003-107		67,0	73,0	10,0	500
01-02-003-108		68,0	75,0	11,0	600
01-02-003-109		69,0	75,0	10,5	600
01-02-003-110		70,0	74,0	11,0	600
01-02-003-111		71,0	77,0	11,0	500
01-02-003-112		72,0	79,0	12,0	500
01-02-003-113		73,0	76,5	9,5	500
01-02-003-114		74,0	77,5	10,5	500
01-02-003-116		75,0	79,0	9,5	500
01-02-003-117		76,0	80,0	10,5	500
01-02-003-118		77,0	81,0	9,5	500
01-02-003-119		78,0	82,0	10,5	500
01-02-003-120		79,0	86,0	13,5	500
01-02-003-121		80,0	84,0	9,5	500
01-02-003-122		81,0	85,0	9,5	500
01-02-003-123		82,0	85,5	9,5	500
01-02-003-124		83,0	86,5	9,5	500
01-02-003-125		84,0	90,0	10,0	500
01-02-003-126		85,0	88,5	9,5	500
01-02-003-128		86,0	90,0	9,5	500

Art-Nr.	Anwendung	Maße			VE/Stk.
		d	D	H	
01-02-003-130		87,0	90,5	9,5	650
01-02-003-131		88,0	91,5	9,5	650
01-02-003-133		90,0	93,5	9,5	650
01-02-003-134		91,0	94,5	9,5	600
01-02-003-135		92,0	95,5	9,5	600
01-02-003-136		93,0	101,0	13,5	500
01-02-003-137		94,0	98,0	9,5	600
01-02-003-138		95,0	98,0	9,5	500
01-02-003-139		96,0	104,0	13,5	500
01-02-003-140		97,0	101,0	9,5	500
01-02-003-141		98,0	102,0	9,5	500
01-02-003-142		99,0	103,0	9,5	500
01-02-003-143		100,0	104,0	10,5	500
01-02-003-144		101,0	105,0	10,5	500
01-02-003-146		103,0	113,0	13,5	500
01-02-003-147		104,0	107,0	10,5	500
01-02-003-148		105,0	108,0	10,5	400
01-02-003-149		106,0	109,0	10,5	400
01-02-003-150		107,0	115,0	13,5	500
01-02-003-151		108,0	112,0	10,5	400
01-02-003-153		110,0	114,0	12,0	650
01-02-003-154		111,0	116,5	13,0	500
01-02-003-155		112,0	115,0	10,0	300
01-02-003-156		115,0	124,0	15,0	250
01-02-003-158		121,0	123,0	12,0	250
01-02-003-159		125,0	136,0	16,0	250
01-02-003-160		130,0	134,5	13,0	250